

Surface mounted LED batten fitting for bathroom, kitchen...




COLOR OF PRODUCT



REPARABILITY



WARRANTY

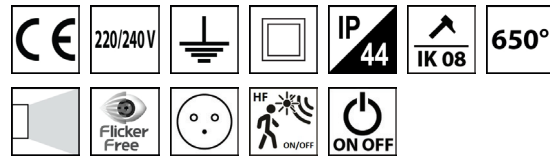

LIFE TIME AND WARRANTY

Nominal norms marking	CE
CE directive	CEI 60598-1 CEI 60598-2-1 : 1989
Security Photobiological	CEI 62471 – : 2008 : RG0

GESTION

Detection mode	HF factory setting: - «DET» 4m-3min-25lux
Sensor Reference	- «DET» DETMC070S
Dimming mode	ON/OFF
Interface controlled	Socket 2P+T 2000W CL1 [PRI] switch CL2 [INT] HF sensor CL2 [DET]

OPTIONS*

Dimming	
CCT color temperature	4000K [NW]
Color of product	Silver [G] chrome [A]

*Voir synoptique (onglet ressources du site internet)

CARACTÉRISTIQUES GÉNÉRALES

Product family range	CORAIL SERIES
Product Family	CORAIL
Life time L80B10 at 25°C	50000hrs
Life time L80B10 at Ta Max	35000hrs
Maintenance	H2O; Antistatic tissu
Réparability	Driver : No / Module : No
Input voltage range / Frequency	AC220-240V +/-6% / 50/60Hz
Operating temperature range Ta	Ta : -5/+25°C
Type of source	Module SMD
Brand of sources	Honglitrronic
Mac Adam index	Mac adam 4
Brand of Driver	PCB-B
Cycles on/off	>100000
Defective rate Driver at 5000hrs	5%
T.H.D @ full load	< 20%
Ripple current	< 7% flicker free
Surge protection	L-N:0.75KV
Position driver on fixture	Integrated inside fixture
Body material	Polycarbonate
Diffuser material	Prismatic polycarbonate
Fixation	Set of 2 adustable bracket
Electrical network interface	Connector 2P 16A 2x hole pole
Vandal proof	No
Accessories	Mounting fixation set
Remarks	Including socket 2P+T 2000W CL1 [PRI]; including switch CL2 [INT]; Including HF sensor CL2 [DET]

TECHNICAL DATA

Product reference	Power (W)	CCT (K)	CRI (Ra)	Beam (°)	Lumen out (lm)	PF	Intensity mA	Lm/w	Color	Dimension (mm)
CORL15060DETWWW	16	3000	>80	130°	1400	0,95	150	88	RAL9003	682x59x66
CORL15060INTWWW	15	3000	>80	130°	1400	0,95	150	94	RAL9003	600x53x65
CORL15060PRIDETWWW	16	3000	>80	130°	1400	0,95	150	88	RAL9003	682x59x66
CORL15060PRIWWW	15	3000	>80	130°	1400	0,95	150	88	RAL9003	682x59x66
CORL15060WWW	15	3000	>80	130°	1400	0,95	150	94	RAL9003	600x53x65

LOGISTIC DATA

Product reference	EAN	HS code EU	Unit weight (kg)	G.W. (kg)	Qty / CTN (pcs)	Dimension CTN (cm)
CORL15060DETWWW	3663156020840	9405104090	0,55	7,5	10	72,5 x 35 x 17,5
CORL15060INTWWW	3663156020741	9405104090	0,46	6,5	10	65 x 31 x 17
CORL15060PRIDETWWW	3663156020857	9405104090	0,6	8,1	10	80,5 x 35 x 17,5
CORL15060PRIWWW	3663156020758	9405104090	0,5	8,2	10	72,5 x 35 x 17,5
CORL15060WWW	3663156020765	9405104090	0,43	6,3	10	65 x 31 x 17

MANAGEMENT

Product reference	Driver brand	Dimming	Protocole
{PRODUCT REFERENCE}	{Driver Ref}	{Dimming}	{Driver protocole compliancy}

PICTURE ACCESSORIES


SENSOR TECHNICAL DATA

Product reference	Standby p (W)	Detection mode	Zoning detection range
CORL15060DETWWW	<0.5W	HF Présence et luminosité	HF ON/OFF
CORL15060INTWWWW			-
CORL15060PRIDETWWWW	<0.5W	HF Présence et luminosité	HF ON/OFF
CORL15060PRIWWWW			-
CORL15060WWWW			-

SENSOR SETTING

Product reference	Timing	Distance P=Ceiling A=Wall
CORL15060DETWWW	5sec-1-3-10min	4-10m
CORL15060INTWWWW		
CORL15060PRIDETWWWW	5sec-1-3-10min	4-10m
CORL15060PRIWWWW		
CORL15060WWWW		

VERSION DETECT HF :



Cablage Maître

